



WQ01方型单轨 Single square guide rails



产品特性 Product features

- 方型铝合金单轨
 - 硬质氧化滑动表面
 - 免维护的线性滑动导轨
 - 免润滑、抗污
 - 重量轻和低噪音
 - 自由设计安装宽度
- Square single guide rails made of aluminum
 - Hard anodized the sliding surface
 - Maintenance-free linear sliding guide rails
 - Lubrication-free and dirt-resistant
 - Light weight and low noise
 - Variable width can be fitted

标准规格 Standard specifications

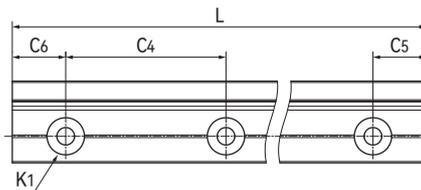

产品编码 Part No.:

WQ01-06-0000-NH

- 空白Blank: 带安装孔 With mounting holes
- NH: 无安装孔 No mounting holes
- 长度 Length
- 尺寸 Size

产品编码 Part No.	da _{-0.1} ⁰ [mm]	G ₂ [mm]	h [mm]	h ₂ [mm]	a [mm]	C ₄ [mm]	C ₅ =C ₆ [mm]		*K ₁ [mm]	L max. [mm]	重量 Weight [kg/m]
							min.	max.			
WQ01-06-0000	5	10.5	4	7.5	14	60	20	49.5	**M4	3000	0.23
WQ01-10-0000	7.5	17	5.5	11	25	120	20	79.5	**M6	3000	0.54
WQ01-16-0000	11.5	19	7.5	14	27	120	20	79.5	M8	3000	0.94
WQ01-20-0000	15	21	9.5	20	27	120	20	79.5	M8	3000	1.41

*K₁用于螺栓 For bolts **M4/M6: 通孔 Plain holes

产品编码 Part No.	da _{-0.1} ⁰ [mm]	G ₂ [mm]	h [mm]	h ₂ [mm]	a [mm]	C ₄ [mm]	C ₅ =C ₆ [mm]		K ₁ [mm]	L max. [mm]	重量 Weight [kg/m]
							min.	max.			
WQ01-06-0000-NH	5	10.5	4	7.5	14	-	-	-	-	3000	0.23
WQ01-10-0000-NH	7.5	17	5.5	11	25	-	-	-	-	3000	0.54
WQ01-16-0000-NH	11.5	19	7.5	14	27	-	-	-	-	3000	0.94
WQ01-20-0000-NH	15	21	9.5	20	27	-	-	-	-	3000	1.41



WQU01方型导轨滑块 Square guide rail blocks



产品特性 Product features

- 安装LIN-11Q方型滑动膜
- 自润滑、免维护
- 用于WQ系列方型导轨
- 抗灰尘、低噪音
- Fitted LIN-11Q square liners
- Maintenance-free, dry-running
- For WQ square guide rails
- Resistant dust and low noise

标准规格 Standard specifications

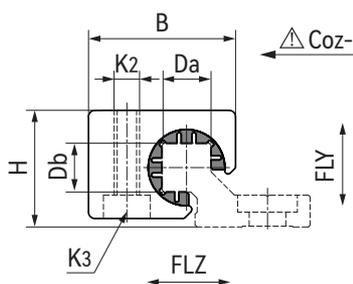

产品编码 Part No.:
WRU01-10-FLY-MN2

材料 Material:MN2
空白 Blank:EPB13

FLY:浮动方向 Floating direction Y
FLZ:浮动方向 Floating direction Z
空白 Blank:标准 Standard

尺寸 Size

产品编码 Part No.	Da ^{+0.102} [mm]	Db ^{+0.032} [mm]	B [mm]	C ₁ [mm]	C ₃ [mm]	K ₂ [mm]	K ₃ [mm]	H [mm]	静态载荷 Static load			重量 Weight [kg/m]
									Coy [N]	Coz+ [N]	Coz- [N]	
WQU01-06	5	5	18	19	10	M4	M3	14	420	420	140	8
WQU01-10	7.5	7.5	26	29	16	M6	M5	20	1200	1200	250	21
WQU01-16	11.5	11.5	34.5	36	18	M8	M6	27	2100	2100	400	51
WQU01-20	15	15	42.5	45	27	M8	M6	36	3200	3200	500	104
WQU01-06-FLY	5	5.5	18	19	10	M4	M3	14	420	420	140	8
WQU01-10-FLY	7.5	8.2	26	29	16	M6	M5	20	1200	1200	250	21
WQU01-16-FLY	11.5	12.5	34.5	36	18	M8	M6	27	2100	2100	400	51
WQU01-20-FLY	15	16	42.5	45	27	M8	M6	36	3200	3200	500	104
WQU01-06-FLZ	5.5	5	18	19	10	M4	M3	14	420	420	140	8
WQU01-10-FLZ	8.2	7.5	26	29	16	M6	M5	20	1200	1200	250	21
WQU01-16-FLZ	12.5	11.5	34.5	36	18	M8	M6	27	2100	2100	400	51
WQU01-20-FLZ	16	15	42.5	45	27	M8	M6	36	3200	3200	500	104


WQU01方型导轨滑块 Square guide rail blocks



产品特性 Product features

- 低成本、免维护
 - 压铸铝合金基座
 - 可选滑动膜EPB13, MN2
 - 抗灰尘、低噪音
 - 可用于WQ系列单轨和双轨
- Low cost, Maintenance-free
 - Die-casting aluminum housing
 - EPB13 and MN2 liners are available
 - Resistant dust and low noise
 - For WQ single and dual guide rails

标准规格 Standard specifications

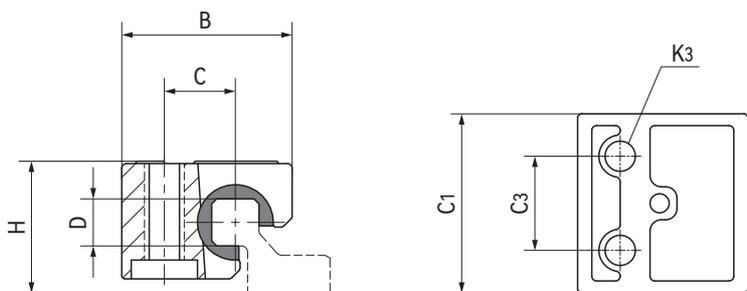

产品编码 Part No.:

WQU01-06-DC-MN2

材料 Material:MN2
空白 Blank:EPB13

压铸铝 Die-cast aluminum

内径 Inner diameter

产品编码 Part No.	D [mm]	公差 Tolerance [mm]	B [mm]	C ₃ [mm]	C ₁ [mm]	H [mm]	K ₃ [mm]	C [mm]	静态载荷 Static load			重量 Weight [g]
									Coy- [N]	Coz+ [N]	Coz- [N]	
WQU01-06-DC	5	+0.102/+0.032	18	10	19	14	M4	7.5	300	300	200	7
WQU01-06-DC-MN2	5	+0.102/+0.032	18	10	19	14	M4	7.5	300	300	200	7


WQ02方型双轨 Double square guide rails



产品特性 Product features

- 方型铝合金双轨
 - 硬质氧化滑动表面
 - 免维护的线性滑动导轨
 - 免润滑、抗污
 - 重量轻和低噪音
 - 标准安装宽度
- Double square guide rails made of aluminum
 - Hard anodized the sliding surface
 - Maintenance-free linear sliding guide rails
 - Lubrication-free and dirt-resistant
 - Light weight and low noise
 - Standard fitting width

标准规格 Standard specifications

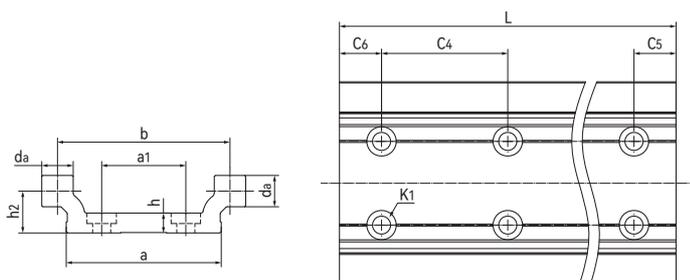

产品编码 Part No.:

WQ02-06-30-0000-NH

- 空白Blank: 带安装孔 With mounting holes
- NH: 无安装孔 No mounting holes
- 长度 Length
- 宽度 Width
- 尺寸 Size

产品编码 Part No.	da ⁰ _{-0.1} [mm]	b [mm]	a [mm]	a ₁ [mm]	h [mm]	h ₂ [mm]	C ₄ [mm]	C ₅ =C ₆ [mm]		*K ₁ [mm]	L max. [mm]	重量 Weight [kg/m]
								min.	max.			
WQ02-06-30-0000	5	30	27	-	4	7.5	60	20	49.5	**M5	3000	0.45
WQ02-10-40-0000	7.5	40	36	-	5.5	11	120	20	79.5	**M6	3000	0.92
WQ02-16-60-0000	11.5	58	54	-	7.5	14	120	20	79.5	M8	3000	1.84
WQ02-20-80-0000	15	82	74	40	9.5	20	120	20	79.5	M8	3000	3.30

*K₁用于螺栓 For bolts **M5/M6: 通孔 Plain holes

产品编码 Part No.	da ⁰ _{-0.1} [mm]	b [mm]	a [mm]	a ₁ [mm]	h [mm]	h ₂ [mm]	C ₄ [mm]	C ₅ =C ₆ [mm]		K ₁ [mm]	L max. [mm]	重量 Weight [kg/m]
								min.	max.			
WQ02-06-30-0000-NH	5	30	27	-	4	7.5	-	-	-	-	3000	0.45
WQ02-10-40-0000-NH	7.5	40	36	-	5.5	11	-	-	-	-	3000	0.92
WQ02-16-60-0000-NH	11.5	58	54	-	7.5	14	-	-	-	-	3000	1.84
WQ02-20-80-0000-NH	15	82	74	-	9.5	20	-	-	-	-	3000	3.30



WQ02H高方型双轨 High double square guide rails



产品特性 Product features

- 高方型铝合金双轨
 - 硬质氧化滑动表面
 - 免维护的线性滑动导轨
 - 免润滑、抗污
 - 重量轻和低噪音
 - 标准安装宽度
- High double square guide rails made of aluminum
 - Hard anodized the sliding surface
 - Maintenance-free linear sliding guide rails
 - Lubrication-free and dirt-resistant
 - Light weight and low noise
 - Standard fitting width

标准规格 Standard specifications

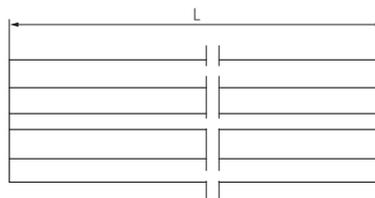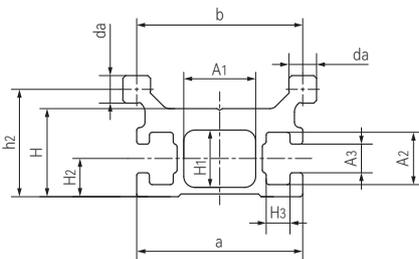

产品编码 Part No.:

WQ02H-06-30-0000

长度 Length
宽度 Width
尺寸 Size

产品编码 Part No.	$da_{-0.1}^0$ [mm]	b [mm]	a [mm]	A_1 [mm]	A_2 [mm]	A_3 [mm]	h_2 [mm]	H [mm]	H_1 [mm]	H_2 [mm]	H_3 [mm]	L max. [mm]	重量 Weight [kg/m]
WQ02H-06-30-0000	5	30	30	13	9.5	5.2	19.5	16	10.4	7	4.3	3000	0.75


WQC01方型导轨滑台 Square guide rail carriages



产品特性 Product features

- 安装LIN-11Q方型滑动膜
 - 自润滑、免维护
 - 重量轻、快速装配
 - 用于WQ系列方型双轨
 - 抵抗灰尘、低噪音
- Fitted LIN-11Q square liners
 - Maintenance-free, dry-running
 - Fast assembly and light weight
 - For WQ double square guide rails
 - rails Resistant dust and low noise

标准规格 Standard specifications

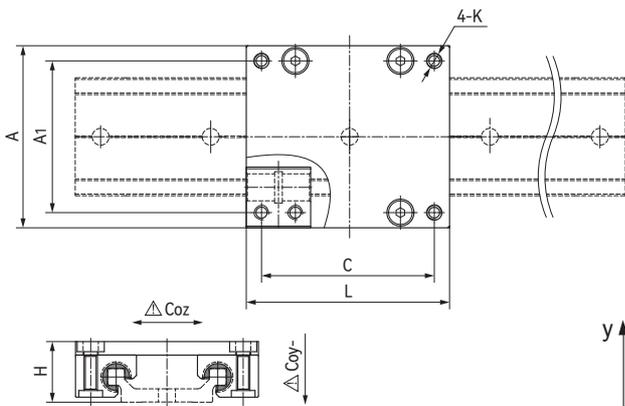

产品编码 Part No.:

WQC01-06-30-060-MN2

材料 Material:MN2

空白 Blank:EPB13

长度 Length

宽度 Width

尺寸 Size

产品编码 Part No.	L [mm]	C [mm]	A [mm]	A ₁ [mm]	H [mm]	K [mm]	静态载荷 Static load					重量 Weight [kg]
							Coy- [N]	Coz [N]	Mox [Nm]	Moy [Nm]	Moz [Nm]	
WQC01-06-30-060	60	51	54	45	18	M4	1680	840	25	34	34	0.07
WQC01-06-30-080	80	71	54	45	18	M4	1680	840	25	51	51	0.09
WQC01-06-30-100	100	91	54	45	18	M4	1680	840	25	68	68	0.12
WQC01-10-40-100	100	87	73	60	24	M6	4800	2400	96	170	170	0.21
WQC01-10-40-150	150	137	73	60	24	M6	4800	2400	96	290	290	0.32
WQC01-10-40-200	200	187	73	60	24	M6	4800	2400	96	410	410	0.42
WQC01-16-60-100	100	82	104	86	35	M8	8400	4200	240	270	270	0.41
WQC01-16-60-150	150	132	104	86	35	M8	8400	4200	240	480	480	0.61
WQC01-16-60-200	200	182	104	86	35	M8	8400	4200	240	690	690	0.80
WQC01-20-80-150	150	132	134	116	44	M8	12800	6400	525	670	670	0.99
WQC01-20-80-200	200	182	134	116	44	M8	12800	6400	525	990	990	1.33
WQC01-20-80-250	250	232	134	116	44	M8	12800	6400	525	1250	1250	1.66


WQC02方型导轨滑台 Square guide rail carriages



产品特性 Product features

- 安装LIN-11Q方型滑动膜
 - 自润滑、免维护
 - 整体式设计、低成本
 - 用于WQ系列方型双轨
 - 抵抗灰尘、低噪音
- Fitted LIN-11Q square liners
 - Maintenance-free, dry-running
 - Mono-design and low cost
 - For WQ double square guide rails
 - Resistant dust and low noise

标准规格 Standard specifications

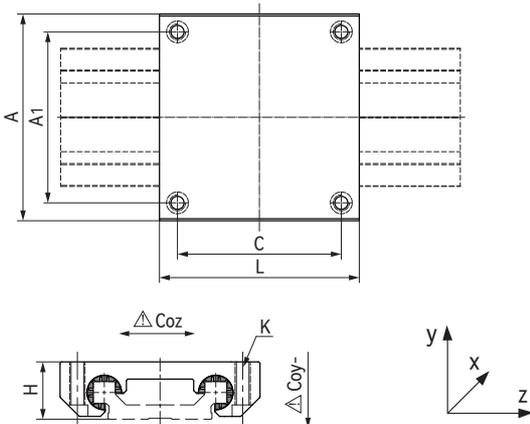

产品编码 Part No.:

WQC02-06-30-060-MN2

材料 Material:MN2
空白 Blank:EPB13

长度 Length

宽度 Width

尺寸 Size

产品编码 Part No.	L [mm]	C [mm]	A [mm]	A ₁ [mm]	H [mm]	K [mm]	静态载荷 Static load					重量 Weight [kg]
							Coy- [N]	Coz [N]	Mox [Nm]	Moy [Nm]	Moz [Nm]	
WQC02-06-30-060	60	51	54	45	16	M4	1680	840	25	34	34	0.07
WQC02-06-30-080	80	71	54	45	16	M4	1680	840	25	51	51	0.09
WQC02-06-30-100	100	91	54	45	16	M4	1680	840	25	68	68	0.12
WQC02-10-40-100	100	87	73	60	22	M6	4800	2400	96	170	170	0.21
WQC02-10-40-150	150	137	73	60	22	M6	4800	2400	96	290	290	0.32
WQC02-10-40-200	200	187	73	60	22	M6	4800	2400	96	410	410	0.42
WQC02-16-60-100	100	82	104	86	30	M8	8400	4200	240	270	270	0.40
WQC02-16-60-150	150	132	104	86	30	M8	8400	4200	240	480	480	0.62
WQC02-16-60-200	200	182	104	86	30	M8	8400	4200	240	690	690	0.87
WQC02-20-80-150	150	132	134	116	40	M8	12800	6400	525	670	670	1.00
WQC02-20-80-200	200	182	134	116	40	M8	12800	6400	525	990	990	1.41
WQC02-20-80-250	250	232	134	116	40	M8	12800	6400	525	1250	1250	1.77


WQC02方型导轨滑台 Square guide rail carriages



产品特性 Product features

- 耐磨层材料TEFPLAS® B
 - 高精度、免维护
 - 最高连续运行速度 1.5m/s
 - 使用温度 $\pm 200^{\circ}\text{C}$
 - 整体式设计、低成本
 - 用于WQ系列方型双轨
 - 抵抗灰尘、低噪音
- Sliding layer material: TEFPLAS® B
 - High precision and maintenance-free
 - Max. continuous running speed 1.5m/s
 - Operation temperature $\pm 200^{\circ}\text{C}$
 - Mono-design and low cost
 - For WQ double square guide rails
 - Resistant dust and low noise

标准规格 Standard specifications

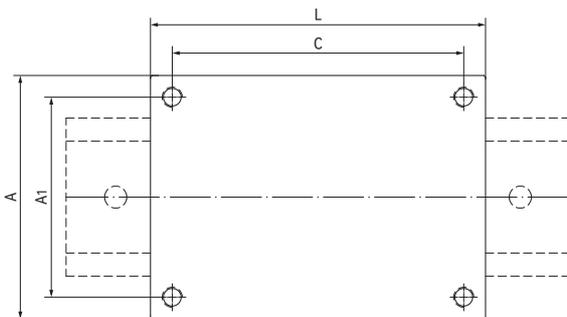

产品编码 Part No.:



WQC02-06-30-060-TPB

材料 Material: TEFPLAS® B

长度 Length

宽度 Width

尺寸 Size



产品编码 Part No.	L [mm]	C [mm]	A [mm]	A ₁ [mm]	H [mm]	K [mm]	静态载荷 Static load					重量 Weight [kg]
							Coy- [N]	Coz [N]	Mox [Nm]	Moy [Nm]	Moz [Nm]	
WQC02-06-30-060-TPB	60	51	54	45	16	M4	9500	4800	70	140	140	0.07
WQC02-10-40-100-TPB	100	87	73	60	22	M6	25000	12500	250	600	600	0.21
WQC02-16-60-100-TPB	100	82	104	86	30	M8	42000	21000	600	1000	1000	0.4
WQC02-20-80-150-TPB	150	132	134	116	40	M8	83000	41500	1700	3000	3000	1.0

***极端高温下运行, 请与CSB销售工程师联系 For operation under extreme high temperature, Please contact us.